



Virtual Infinite Stiffness Loading System (GDSVIS)

Overview: The GDS Virtual Infinite Stiffness loading system (GDSVIS) is the premier load frame in the GDS range. The VIS allows the axial loading system to operate as though it has infinite stiffness (zero system compliance). This type of frame is unique to GDS. The VIS functionality is achieved by calibration and correction of system compliance.

The GDSVIS is extremely stiff and designed principally for rock testing to allow minimum backlash at the point of sample shearing (other, less stiff load frames do not give analogous results at this critical point in the test due to the recovery of the load frame under fast unload conditions).

Key Features:

Electro-mechanical actuators that give superior performance, reduce space and provide cost savings:	Electro-mechanical actuators can carry out tests with greater accuracies than comparable pneumatic actuators. Mains powered means no external noisy power packs and opposed to pneumatic systems electro-mechanical systems draw only the power that is required.
Load-deformation relationship:	The GDSVIS is calibrated to provide precise data on the load-deformation relationship of the entire load application and load measuring system, which is then automatically used for self compensation.
Built in feedback:	All VIS frames have feedback control and continuous display of axial load and platen displacement to allow simple and confident control of force and displacement.
Automatic correction:	VIS provides automatic correction for system compliance, a common cause of error, which can under-estimate results of sample stiffness.

Benefits to the User:

Technical Specification:

Computer Interface:	USB
Dimensions:	Nominal Size: 2.3m x 1.0m x 0.96m
Displacement Accuracy:	0.05% of full range
Displacement Range (mm):	100
Load Range (kN):	250, 400
Power:	92-265 VAC, 48-62Hz, 650-2000W, single phase earthed supply
Sample Sizes (mm):	38, 50, 54, 70, 76, 100, 150, 300

Optional Extras:

P-S Wave Measurement	Dependant on triaxial cell
LVDT Local Strain Transducers	50, 70, 100mm
Hall Effect Local Strain Transducers	38, 50, 70, 100mm
Temperature Control	-20°C to +65°C -20°C to +80°C

Systems Elements & Options

The fundamental system hardware elements are shown in Fig. 1 below. The actual hardware used may be chosen to suit your testing and budgetary requirements.

GDSLAB Software

The GDSLAB control and acquisition software is a highly developed, yet extremely flexible software platform. Starting with the Kernel module and the ability to perform data acquisition only, additional modules may be chosen for your testing requirements.



Note: Connection via USB interface to PC.

USB 8 Channel Logger (PAD)

The USB Pad provides eight fully independent channels of simultaneously sampled ultra-high resolution 24-bit data. Each channel provides 22 software selectable gain ranges, precision ratiometric transducer excitation, monitoring and acquisition - an industry standard DIN connection allows the full-range of GDS transducers to be quickly and easily connected and configured.



Pore Pressure (kPa)
Axial Strain (mm)
Load Cell (kN)

Load frame control

Cell pressure / volume

Back pressure / volume



Pressure Volume / Controllers

- Enterprise Pressure Volume Controllers (1MPa) (ELDPC).
- Standard Pressure Volume Controllers (3MPa) (STDDPC).
- Advanced Pressure Volume Controllers (2MPa) (ADVDPV).
- High Pressure Volume Controllers (≥ 16 MPa) (HPDPC).

Load Frames & Triaxial Cells

- 250kN (25ton)
- 400kN (40ton)
- Daylight clearance:
- Max width: 750 mm
- Max height: 1050 mm

Sample Size (Diameter)

- 38, 50, 54, 70, 76, 100, 150mm

Applications in the geotechnical laboratory

Through the control panel (stand alone) or through the computer interface, you can enter either targets or linear time ramps of load or platen displacement. These RAMP functions can also be used to cycle load or displacement in a low frequency triangular wave form. Of course, via the computer interface, any wave form is possible. All GDSVIS machines are fully compatible with GDSLAB control and data acquisition software. Conventional and advanced tests can be carried out including:

- Classic compression and extension
- Creep (constant axial total stress)
- Stress paths defined in terms of the stress invariants p and q , or s and t
- Cyclic stress paths
- Low frequency cyclic loading

(Please refer to the GDSLAB dedicated datasheet for more details on control software).



Load frames and dimensions

250kN

Height: 2.80m
Width: 1.08m
Depth: 0.67m
Daylight clearance for test cell
Max width: 750 mm
Max height: 1050 mm

400kN

Height: 2.88m
Width: 1.08m
Depth: 0.71m
Daylight clearance for test cell
Max width: 750 mm
Max height: 1050 mm

How does VIS (Virtual Infinite Stiffness) work?

VIS is a unique GDS development. To the observer, and in terms of the test specimen, it allows the axial loading system to appear to have infinite stiffness.

For the entire loading range, both the measurement and control of platen displacement is automatically corrected so that it corresponds to the deformation that occurs between the platen and the load button of the load cell. In this way, the platen displacement is corrected for strain in the load cell and side columns, bending flexure of the cross beams, and distortion within the motorised mechanical transmission.

The GDSVIS is computer calibrated to provide precise data on the load-deformation relationship of the entire load application and load measuring system. These measurements are made with the adjustable upper cross beam in the maximum and minimum positions. For each position, measurements are made with the platen at each end of its travel. The calibration data is loaded into the read only memory (ROM) of the system which constantly monitors the axial load and sets the calibration to apply a correction to the platen displacement. Therefore, it appears to the observer (or controlling computer) that the measurement of platen displacement (resolved to 0.1 micrometre) is derived from a machine with infinite stiffness. In this way the system has the characteristic of Virtual Infinite Stiffness.

Fig. 2 shows a 250kN VIS

Tests that can be Performed:

B-Check, Consolidated Drained (CD) Triaxial, Consolidated Undrained (CU) Triaxial, Consolidation (Triaxial), Constant rate of Loading (CRL) Consolidation, Constant rate of strain (CRS) Consolidation, Slow Cyclic Testing, K0 (K-Zero), Multi-stage Testing, Quasi-Static (low speed/creep) Tests, Stress Paths and Unconsolidation Undrained (UU) Triaxial.

GDSLAB Control Software

GDSLAB is the control and data acquisition software for geotechnical laboratory applications. GDSLAB starts with a core application known as the kernel. The GDSLAB kernel allows for data acquisition from your hardware, but no test control. Simply add the appropriate module or modules to complete the test suite functionality you require. GDSLAB is compatible with all existing GDS equipment and furthermore key hardware from other manufacturers.

GDSLAB has the ability to be configured to your hardware of choice, no matter how unique the arrangement. A text file (*.ini) or initialisation file is created that describes the hardware connectivity to the PC. The hardware layout is available in graphical format via the GDSLAB 'object display'. This makes setting up the devices and checking the connectivity extremely simple.

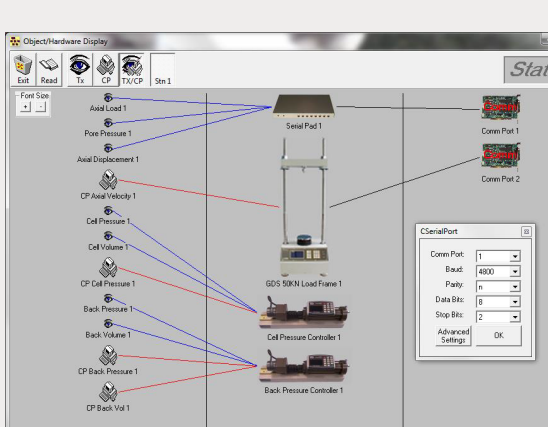


Fig 4. Show a typical set-up screen in GDSLAB

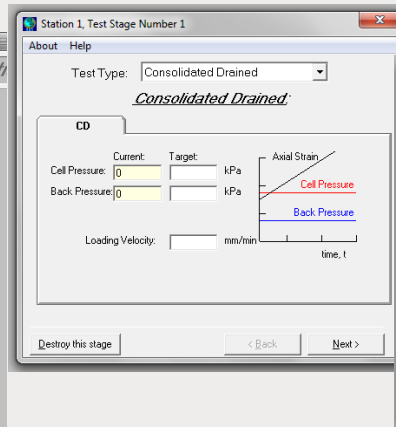


Fig 5. Show a typical station test stage set-up in GDSLAB

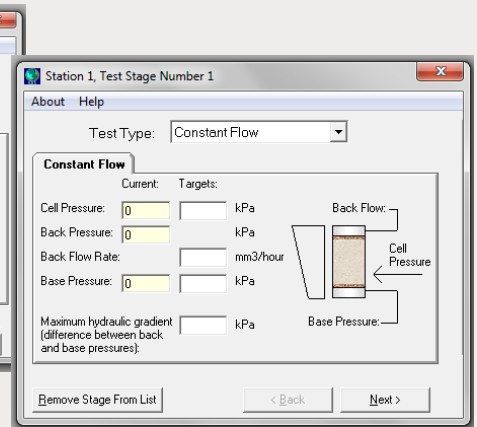


Fig 6. Show a typical station test stage set-up in GDSLAB

Required Operating System: Windows 7 SP1 or higher (We strongly recommend that Windows is fully up to date and running the latest Service Pack/Version available). Recommended PC Specification: 2GHz processor, 4GB Ram, 64Bit Operating System and USB connectivity. Note: GDS software can run on lower spec PC's however; performance and processing of data may be affected.

GDSLAB REPORTS Presentation Software

GDSLAB REPORTS software presents data obtained by GDSLAB to the National Standard, BS 1377:1990. The program can be used to present data whether obtained from a GDSLAB data file or inputted by hand.

GDSLAB Reports can as be used with other manufacturer's dataloggers as well as all versions of GDS data logger. The results can be exported as a CSV file into Microsoft Excel, allowing the user to customise the layout of results.

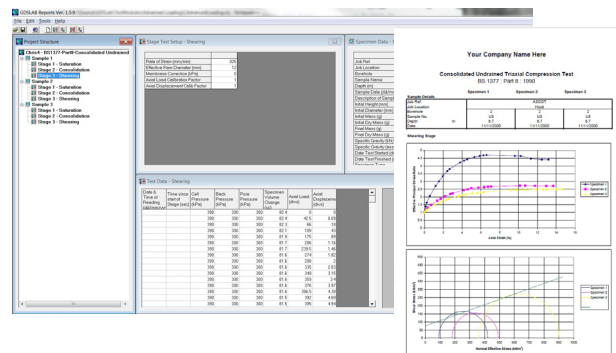


Fig 7. show a selection of screenshots from the GDLAB Reports software.

USB 8 Channel Logger Used in GDSVIS



Overview: The USB 8 channel logger is a 24 bit digital acquisition system developed specifically for use with transducers likely to be used in a geotechnical laboratory.

The device provides eight fully independent channels of simultaneously sampled high resolution data. Each channel has 22 software selectable gain ranges with precision ratiometric transducer excitation and input. Industry standard DIN connectors allow the full-range of GDS transducers to be quickly and easily connected and configured.

A standard USB interface provides direct PC connectivity and is fully supported by the GDSLab test software allowing seamless integration into new and existing test setups. With the ability to connect multiple USB Pads per PC it is possible to build, expand and customise data acquisition systems by using multiple devices to suit requirements.

Technical Specification:

Connection to PC:	USB
Acquisition Channels:	8
Multi Box Capability:	x10
Max Number of Channels:	Up to 80
Sample Rate:	1Hz
Resolution:	24 Bit: 16,777,216
Gain Ranges:	22 (User defined in software)
Software:	GDSLAB
Voltage Resolution:	~ 0.000003 mVolts (3 nanovolt) at +/-22mV range
Voltage Input Type:	Fully Differential, Balanced Precision Inputs with Integrated Signal Conditioning
Transducer Excitation Voltage:	10V DC, differential +/-5V independent excitation
Input Ranges:	22 Independently Selectable Ranges Per Channel from (-22...+22mV) to +/-23.5V
Excitation Fault Tolerance:	Independent per channel, if any channel is shorted the other channels will continue to operate normally
Excitation/Transducer Fault Detection:	Overvoltage, Overcurrent, Absent Transducer
Data Acquisition Options:	Digital filtering for noise reduction from 300Hz oversampled source
Transducer Calibration:	Linear
Display and Monitoring:	Data acquisition in GDSLab via USB interface

GDS have supplied equipment to over 86% of the world's top 50 Universities:

GDS have supplied equipment to over 86% of the world's top 50 Universities who specialise in Civil & Structural Engineering, according to the "QS World University Ranking 2020" report.

GDS also work with many commercial laboratories including BGC Canada, Fugro, GEO, Geolabs, Geoteko, Golder Associates, Inpijn Blokpoel, Klohn Crippen, MEG Consulting, Multiconsult, Statens Vegvesen, NGI, Ramboll, Russell Geotechnical Innovations Ltd, SA Geolabs, SGS, Wiertsema and Partners to name a few.

Would you recommend GDS equipment to your colleague, friend or associate?

100% of our customers answered "YES"

Results from our post-delivery survey asked customers for feedback on their delivery, installation (if applicable), supporting documentation, apparatus and overall satisfaction with GDS. The survey ran for two years.



Made in the UK:

All GDS products are designed, manufactured and assembled in the UK at our offices in Hook. All products are quality assured before they are dispatched.

GDS are an ISO9001:2015 accredited company. The scope of this certificate applies to the approved quality administration systems relating to the "Manufacture of Laboratory and Field Testing Equipment".

**40 YEARS OF
BRITISH
INNOVATION**

Extended Warranties:

All GDS apparatus are covered by a 12 month manufacturers warranty. In addition to the standard warranty, GDS offer comprehensive extended warranties for 12, 24 and 36 months, for peace of mind against any repairs in the future. The extended warranties can be purchased at any time during the first 12 months of ownership.



GDS Training & Installation:

All installations & training are carried out by qualified engineers. A GDS engineer is assigned to each order throughout the sales process. They will quality assure the apparatus prior to shipping, if installation has been purchased, install the apparatus on the customers site & provide the training.



Technical Support:

GDS understand the need for ongoing after sales support, so much so that they have their own dedicated customer support centre. Alongside their support centre GDS use a variety of additional support methods including remote PC support, product helpsheets, video tutorials, email and telephone support.

